PLEASE READ AND FOLLOW ALL WARNINGS

AIR TOOLS

FP-793B & FP-793BL
Super Duty Impact Wrench

Read Operating Instructions
Always become familiar with all the instructions and warnings before operating any power tool.

Always Wear Approved Eye Protection
Impact resistant eye protection should meet or exceed the standards as set forth in the United States ANSI Z87.1, Occupational and Educational Eye and Face Protection. Look for the marking Z87.1 on your eye protection to insure that it is an approved style. For further information, ANSI Z87.1, Occupational and Educational Eye and Face Protection, is available from the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036.

Hearing Protection is Recommended
Hearing protection should be used when the noise level exposure equals or exceeds an 8 hour time-weighted average sound level of 85 dBA. Process noise, reflective surfaces, other tools being operated nearby, all add to the noise level present in your work area. If you are unable to determine your noise level exposure, we recommend the use of hearing protection.

Avoid Prolonged Exposure to Vibration
Tools can vibrate during use. Prolonged exposure to vibration or very repetitive hand and arm movements, can cause injury. Stop using any tool if discomfort, tingling feeling or pain occurs. You should consult your physician before resuming use of the tool.

90 PSIG Maximum
This tool is designed to operate at An air pressure of 90 pounds per square inch gauge pressure (90 PSIG) maximum, at the tool. Use of higher air pressure can, and may cause injury. Also, the use of higher air pressure places the internal components under loads and stresses they were not designed for, causing premature failure. The air supply should be clean and dry, preferably lubricated. For best results, drain the moisture from your compressor daily.

WARNING:
Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to cause cancer, birth defects or reproductive harm. Some examples of these chemicals are:

- Lead from lead-based paints
- Crystalline silica from bricks, cement and other masonry products
- Arsenic and chromium from chemically treated lumber

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals, work in a well-ventilated area and work with approved safety equipment such as those dust masks that are specially designed to filter out microscopic particles.

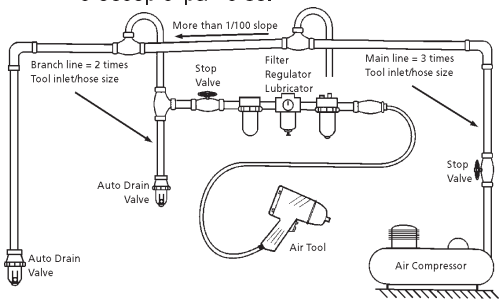

- 1,800 ft. lb. Torque
- Unique Low Wear Pin-less Hammer Design
- Weighs Only 26.8 lbs.
- Rugged Construction with Bolt On Side Handle
- Combination Through Hole & Friction Ring Anvil
- Precision Engineered Motor for Added Reliability

Extended Anvil Shown

Safety Instructions

The following instructions are furnished as general guidelines for use of your pneumatic tool. They cannot comprehensively cover all possible or conceivable uses of the subject tool. For additional information on the safe use of air tools, we advise you to obtain a copy of CAGI B186.1-2009 Safety Code for Portable Air Tools, available from the following source:
COMPRESSED AIR AND GAS INSTITUTE
1300 Sumner Avenue
Cleveland, OH 44115-2851
Ph: 216-241-7333
www.cagi.org OR from
Florida Pneumatic Manufacturing Corp.
851 Jupiter Park Lane
Jupiter, FL 33458
561-744-9500 www.florida-pneumatic.com
The use of the word "shall" in the following instructions, indicates that adherence to the particular requirement is necessary to conform to CAGI B186.1-2009.

Tool Application and Usage

Portable tools shall be used only for the purposes intended in their design and within the capacity for which they were intended and rated. It shall be the tool owner's and/or employer's responsibility to instruct each operator in the safe use of the tool. Tools shall not be used without guards and safety devices as furnished by the manufacturer. Where an air tool is modified or altered, the modifier shall provide the safeguards to enable it to be safely used in the operations intended and to comply with any applicable provisions as contained in ANSI B186.1.

Tool Installation

Pressure regulators shall be used to limit air pressure to the rated pressure where the supply pressure exceeds the tool's rated pressure. Air hoses and lines shall be relieved of compressed air before being disconnected or disjointed, unless there is automatic valve closing protection at the joint being separated. Synthetic lubricants which can cause deterioration of elastomer seals shall not be used in air systems of air tools.

Tool Maintenance

It shall be the tool owner's and/or employer's responsibility to assure that tools are maintained in a safe operating condition. Tool maintenance and repair shall be performed by authorized, trained, competent personnel. Tools shall be disconnected from their compressed air supply before repairs are attempted. Repairs shall be consistent with the manufacturer's recommended procedures. Tool, hoses and fittings shall be replaced if unsuitable for safe operation. It shall be the tool owner's and/or employer's responsibility to keep required rating markings and warnings on the tool in legible condition.

Florida Pneumatic
A Division of Florida Pneumatic Manufacturing Corporation
851 Jupiter Park Lane, Jupiter , Florida 33458
(561) 744-9500 • Fax (561) 575-9134 • Toll Free 1-800-327-9403

Read these instructions carefully before attempting to install, operate or service this Universal Tool product. Failure to comply with the instructions could result in personal injury and/or property damage! Retain these instructions for future reference.

FPMC

AIR TOOLS

FP-793B & FP-793BL
Super Duty Impact Wrench

Specifications

Description	Model No.	Free Speed RPM	Bolt Capacity (in)	Square Drive (in)	Impacts Per Min.	Max.Torque ft. lb. @ 90psi	Weight (lbs.)	Length (in.)	Air Inlet (NPT)	Rec. Hose Size (in.)	Rec. Air Pres.	Air Cons. (cfm)
1" Straight Impact Wrench	FP-793B	5,000	1-1/4	1	1,400	1,800	23.25	14	1/2	1/2 I.D.	90 psi	12
1"-8" Ext. Str. Impact Wrench	FP-793BL	5,000	1-1/4	1	1,400	1,800	26	22	1/2	1/2 I.D.	90 psi	12

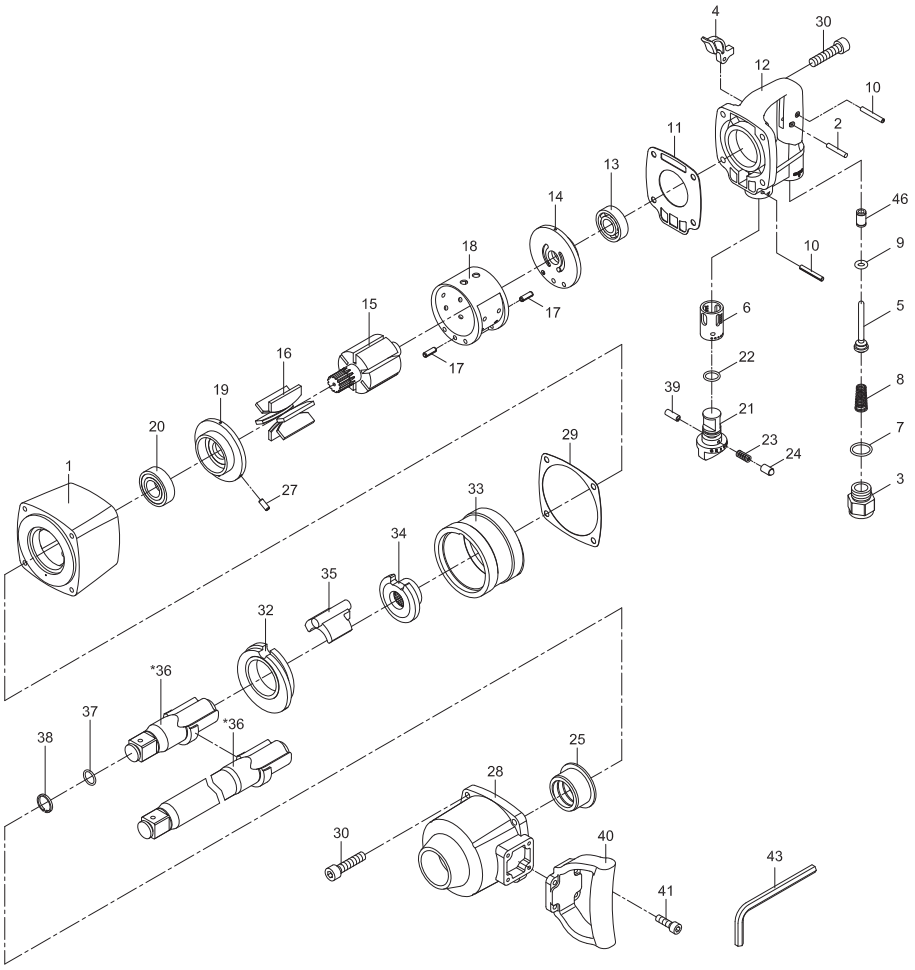

REF #	PARTS NO.	DESCRIPTION	Q'TY	REF #	PARTS NO.	DESCRIPTION	Q'TY
1	947-407101	Motor Housing	1	22	9OR01608204	O-Ring	1
2	9PN04002308	Pin	1	23	943-403323	Spring	1
3	947-407103	Air Inlet	1	24	943-403324	Pin	1
4	947-407104	Trigger	1	25	947-407125	Anvil Bushing	1
5	947-407105	Valve Stem	1	27	9SP04001000	Spring Pin	1
6	947-407106	Reverse Valve Bushing	1	28	947-407128	Hammer Case	1
7	9OR01908204	O-Ring	1	29	947-407135	Gasket	1
8	943-403147	Valve Spring	1	30	947-407130-12	Screw	8
9	9OR00705305	O-Ring	1	32	947-407112	Side Plate	1
10	961902	Spring Pin	2	33	947-407108	Hammer Frame	1
11	947-407134	Gasket	1	34	947-407109	Hammer Cam	1
12	947-407220	Rear Cover	1	35	947-407111	Hammer	1
13	90610146	Ball Bearing	1	36	947-407102-11	Anvil (1")	1
14	947-407114	Rear End Plate	1		947-4071L02-91	Anvil (1" L=9")	1
15	947-407115	Rotor	1	37	910211	O-Ring	1
16	947-407116	Rotor Blade	6	38	947-405112	Retainer Ring	1
17	9SP06001800	Spring Pin	2	39	940317-14	Spring Pin	1
18	947-407118	Cylinder	1	40	947-407160	Dead Handle	1
19	947-407119	Front End Plate	1	41	97H-753528	Screw	4
20	906205Z	Ball Bearing	1	43	910018	Hex. Key Wrench	1
21	947-407121	Air Regulator	1	46	947-407146	Valve Bushing	1

Limited Warranty

Florida Pneumatic warrants its tools to be free from defects in material and workmanship for two years from the date of purchase. This warranty does not apply to tools which have been abused, misused, modified or repaired by someone other than Florida Pneumatic or its authorized service centers. If a Florida Pneumatic tool proves defective in material or workmanship within two years after purchase, return it to any authorized service center or to Florida Pneumatic, freight prepaid. Please enclose your name, address and adequate proof of purchase date with a brief description of the defect. Florida Pneumatic will, at its option, repair or replace defective tools, free of charge. Repairs or replacements are warranted as described above for the remainder of the warranty period. Florida Pneumatic's sole liability and your exclusive remedy under this warranty is limited to repair or replacement of the defective tool. There are no other warranties expressed or implied and Florida Pneumatic shall not be liable for incidental, consequential or special damages, or any other damages, costs or expense of repair or replacement as described above.